


# GGR Hydraulica [ 1000kg ]

## POWER TILTER

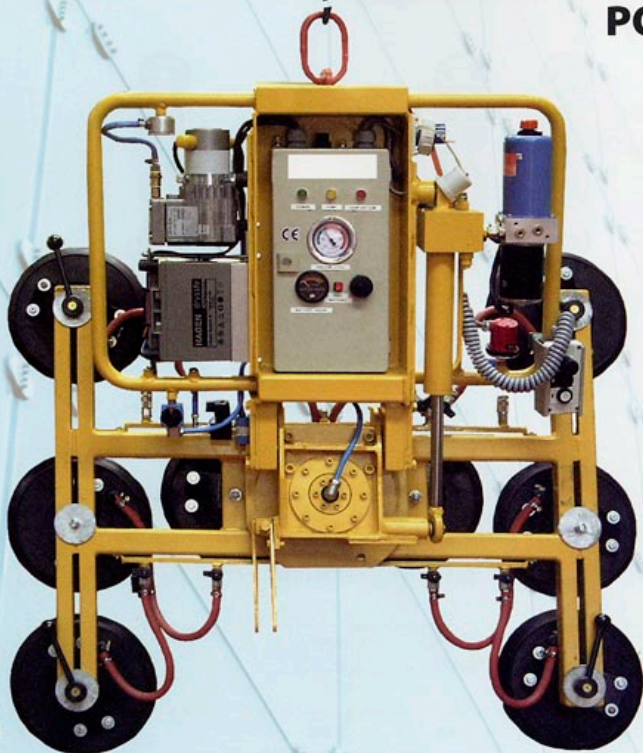

### GGR Hydraulica (1000kg)


The Hydraulica is an adaptable eight pad lifter that comes with two extension arms as standard that increase capacity from 800kg to 1000kg and offer additional stabilisation for longer loads. Powered tilting between upright and flat is also standard, together with 360° manual rotation. The fully-featured Hydraulica also includes a cable remote control for suction application/release and tilting.

The Hydraulica is delivered with its own wheeled stand, which prevents damage when not in use and allows the lifter to be quickly wheeled into position when required.

- Cable remote control
- On-board maintenance-free vacuum pump powered by 12v battery with integral charger or 110v/240v mains
- Optional wheeled stand
- Auto switch to battery in event of mains failure and visual low battery warning
- Individual pads can be isolated to accommodate irregular shapes
- Vacuum reserve tank
- Motor-driven tilting from vertical to horizontal
- Audio-visual low vacuum indication
- Extension arms included as standard
- Manual 360° rotation

Code VGL55

## TECH SPEC

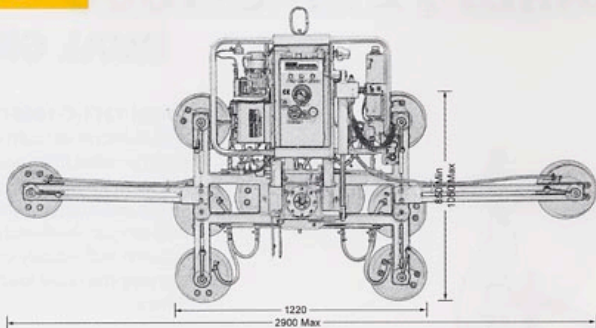

|   |   |
|---|---|
| <b>Suitable for lifting</b>   | material properties: gastight<br>surface: smooth or slightly structural<br>eg: glass, plastic boards, ceramic plates, sheet metals, coated boards |
| <b>Suction cup type</b>   | approx diameter: 300mm  |
| <b>Suction cup quality</b>  | description: black rubber, not abrasion resistant, heat resistant up to 100°C   |
| <b>Number of suction cups</b>   | cups: 10                      8   |
| <b>Loading capacity of frame</b><br>(on smooth and clean surface at 60% vacuum) | vertical: 1000kg            800kg<br>horizontal: 1000kg        800kg  |
| <b>Weight of lifter</b>   | approx: 100kg            120kg  |
| <b>Structural depth</b>   | approx: 310mm            310mm  |
| <b>Output</b>   | approx: 1.5m <sup>3</sup> /h  |
| <b>Voltage</b>  | pump: 12v DC from rechargeable battery<br>battery charger: 110v/240v 50/60Hz single phase factory selectable                                      |
| <b>Standard accessories</b>   | standard: 2 x extension arms with pad, cable remote control   |

